


Ceramic Spherical Bearings

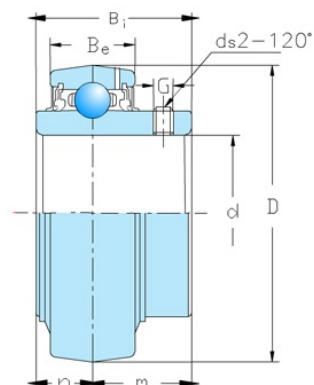

Номер подшипника.	Диаметр вала		Граничные размеры (мм)							Базовая грузоподъемность		Вес (кг)
	в.	мм	Д:	Би	Быть	н	м	Г	дс	С	Ко	
UC201	-	12	47	31	16	12.7	18.3	5	M6x1.0	12890	6490	0.21
UC201-8	1/2	-	47	31	16	12.7	18.3	5	1/4-28UNF	12890	6490	0.21
UC202	-	15	47	31	16	12.7	18.3	5	M6x1.0	12890	6490	0.2
UC202-10	5/8	-	47	31	16	12.7	18.3	5	1/4-28UNF	12890	6490	0.19
UC203	-	17	47	31	16	12.7	18.3	5	M6x1.0	12890	6490	0.18
UC204	-	20	47	31	16	12.7	18.3	5	M6x1.0	12890	6490	0.17
UC204-12	3/4	-	47	31	16	12.7	18.3	5	1/4-28UNF	12890	6490	0.18
UC205	-	25	52	34	17	14.3	19.7	5.5	M6x1.0	14000	7560	0.2
UC205-14	7/8	-	52	34	17	14.3	19.7	5.5	1/4-28UNF	14000	7560	0.23
UC205-15	15/16	-	52	34	17	14.3	19.7	5.5	1/4-28UNF	14000	7560	0.21
UC205-16	1	-	52	34	17	14.3	19.7	5.5	1/4-28UNF	14000	7560	0.2
UC206	-	30	62	38.1	19	15.9	22.2	6	M6x1.0	19510	11160	0.33
UC206-17	1-1/16	-	62	38.1	19	15.9	22.2	6	1/4-28UNF	19510	11160	0.37
UC206-18	1-1/8	-	62	38.1	19	15.9	22.2	6	1/4-28UNF	19510	11160	0.35
UC206-19	1-3/16	-	62	38.1	19	15.9	22.2	6	1/4-28UNF	19510	11160	0.33
UC206-20	1-1/4	-	62	38.1	19	15.9	22.2	6	1/4-28UNF	19510	11160	0.3
UC207	-	35	72	42.9	20	17.5	25.4	6.5	M8x1.0	25640	15330	0.4
UC207-20	1-1/4	-	72	42.9	20	17.5	25.4	6.5	5-16/24UNF	25640	15330	0.55
UC207-21	1-5/16	-	72	42.9	20	17.5	25.4	6.5	5-16/24UNF	25640	15330	0.52
UC207-22	1-3/8	-	72	42.9	20	17.5	25.4	6.5	5-16/24UNF	25640	15330	0.49
UC207-23	1-7/16	-	72	42.9	20	17.5	25.4	6.5	5-16/24UNF	25640	15330	0.46
UC208	-	40	80	49.2	21	19	30.2	8	M8x1.0	28890	17110	0.65
UC208-24	1-1/2	-	80	49.2	21	19	30.2	8	5-16/24UNF	28890	17110	0.69

Ceramic Spherical Bearings

UC208-25	1-9/16	-	80	49.2	21	19	30.2	8	5-16/24UNF	28890	17110	0.67
UC209	-	45	85	49.2	22	19	30.2	8	M8x1.0	32670	18220	0.7
UC209-26	1-5/8	-	85	49.2	22	19	30.2	8	5-16/24UNF	32670	18220	0.8
UC209-27	1-11/16	-	85	49.2	22	19	30.2	8	5-16/24UNF	32670	18220	0.76
UC209-28	1-3/4	-	85	49.2	22	19	30.2	8	5-16/24UNF	32670	18220	0.71
UC210	-	50	90	51.6	24	19	32.6	9	M10x1.25	35110	20840	0.8
UC210-30	1-7/8	-	90	51.6	24	19	32.6	9	3/8-24UNF	35110	20840	0.87